


C150 FEATURES & BENEFITS

- The C150 -8 is equipped with a powerful hydraulic motor that requires up to 8 gpm @ 2000-2500 psi 11.7 hp @ 8 gpm and 2500 psi.
- The C150 -12 is equipped with a powerful hydraulic motor that requires up to 12 gpm @ 2000-2500 psi 17.4 hp @ 12 gpm and 2500 psi.
- Makes clean plunge, bottom, notch, trim and corner cuts without over cutting.
- Cast aluminum ergonomic frame enhances cutting precision while reducing operator fatigue.
- Cushioned handles and balanced weight distribution enhances cutting with minimal force.
- Dual function trigger starts and stops tool and water simultaneously.
- Trigger lockout safety feature is standard.
- Water flow system delivers maximum lubrication, cooling and abrasive flushing through internal water passages in the bars.
- Roller nose sprocket maximizes chain and bar life.
- 15 in. bar provides full 15 in. cutting depth.
- 20 in. bar provides full 20 in. cutting depth.
- 30 in. bar provides full 30 in. cutting depth.
- Choose from these diamond segmented chains:
 - S-series chains cut medium soft to very hard aggregate with moderate to heavy steel rebar.
 - L-series chains cut green concrete, brick and concrete block without steel rebar.
- Can be powered by an RGC or HydraPak or any other compatible power source.

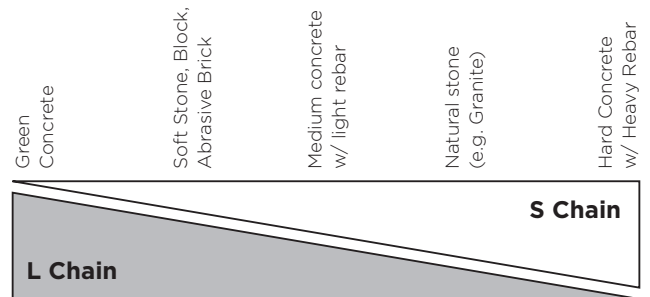

CHAIN APPLICATION GUIDE

C150 CHAINSAW SPECIFICATIONS

MODEL	C150-8 w/ 15 in. Bar	C150-8 w/ 20 in. Bar	C150-12 w/ 15 in. Bar	C150-12 w/ 20 in. Bar	C150-12 w/ 30 in. Bar
Cutting Depth	15 in. (38.1 cm)	20 in. (50.8 cm)	15 in. (38.1 cm)	20 in. (50.8 cm)	30 in. (76.2 cm)
Bar Size	22.3 x 4 in. (55.9 x 10.2 cm)	26.5 x 4 in. (66.5 x 10.2 cm)	22.3 x 4 in. (55.9 x 10.2 cm)	26.5 x 4 in. (66.5 x 10.2 cm)	34.8 x 4 in. (88.3 x 10.2 cm)
Flow	8 gpm (30 lpm)	8 gpm (30 lpm)	12 gpm (45 lpm)	12 gpm (45 lpm)	12 gpm (45 lpm)
Pressure Range	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)
Water Flow	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)
Weight (less bar & chain)	30 lbs. (14 kg)	30 lbs. (14 kg)	30 lbs. (14 kg)	30 lbs. (14 kg)	30 lbs. (14 kg)