


C120™ FEATURES & BENEFITS

- The C120™ is equipped with a powerful hydraulic motor that requires up to 12 gpm @ 2000-2500 psi. 17.4 hp at 12 gpm and 2500 psi.
- Makes clean plunge, bottom, notch, trim and corner cuts without over-cutting.
- Cast aluminum ergonomic frame enhances cutting precision while reducing operator fatigue.
- Cushioned handles and balanced weight distribution enhance cutting with minimal force.
- Dual function trigger starts and stops tool and water simultaneously.
- Trigger lockout safety feature is standard.
- Water flow system delivers maximum lubrication, cooling and abrasive flushing through internal water passages in the bars.
- Roller nose sprocket maximizes chain and bar life.
- 10 in. bar provides full 10 in. cutting depth.
- 15 in. bar provides full 15 in. cutting depth.
- 20 in. bar provides full 20 in. cutting depth.
- 25 in. bar provides full 25 in. cutting depth.
- 30 in. bar provides full 30 in. cutting depth.
- Choose from these diamond segmented chains:
 - S-series chains cut medium-soft to very hard aggregate with moderate to heavy steel rebar.
 - L-series chains cut green concrete, brick and concrete block without steel rebar.
- Can be powered by an RGC HydraPak or any other compatible hydraulic source.

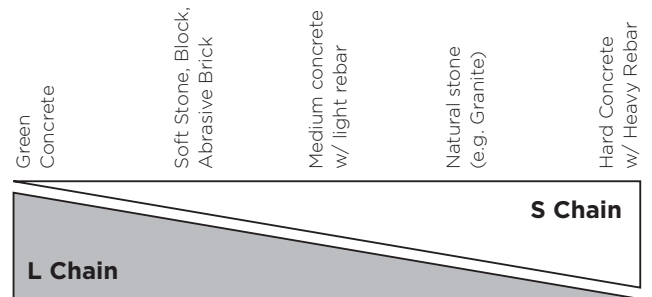

CHAIN APPLICATION GUIDE

C120 CHAINSAW SPECIFICATIONS

MODEL	C120™ w/ 10 in. Bar	C120™ w/ 15 in. Bar	C120™ w/ 20 in. Bar	C120™ w/ 25 in. Bar	C120™ w/ 30 in. Bar
Cutting Depth	10 in. (25.4 cm)	15 in. (38.1 cm)	20 in. (50.8 cm)	25 in. (63.5 cm)	30 in. (76.2 cm)
Bar Size	17 x 3 in. (43 x 7.6 cm)	20.5 x 3 in. (52 x 7.6 cm)	25.5 x 3 in. (64.7 x 7.6 cm)	30.5 x 3 in. (77.5 x 7.6 cm)	35 x 3 in. (89 x 7.6 cm)
Flow	12 gpm (45 lpm)	12 gpm (45 lpm)	12 gpm (45 lpm)	12 gpm (45 lpm)	12 gpm (45 lpm)
Pressure Range	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)	2000 - 2500 psi (138 - 172 bar)
Water Flow	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)	2.5 gpm @ 50 psi (9 lpm @ 3 bar)
Weight (with bar & chain)	24 lbs. (11 kg)	25 lbs. (11 kg)	26 lbs. (12 kg)	27 lbs. (12 kg)	28 lbs. (13 kg)